


A1202 DF57 CONNECTOR

1.20mm Pitch/Disconnectable Crimp style connectors

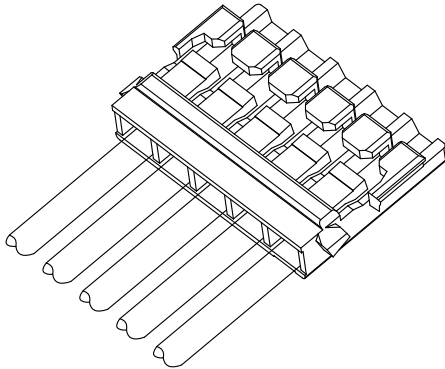

Specifications: _____

- Current rating: 2.0 A / AC,DC
- Voltage rating: 50 V AC/DC
- Temperature range: -40°C ~ +105°C
(including temperature rise in applying electrical current)
- Contact resistance: Initial value/ 20m Ω max
After environmental tests/20mQ max.
- Insulation resistance: 100 M Ω min
- Withstanding voltage: 500 VAC/minute
- Applicable wire: Conductor size/ AWG#32~#28
Insulation O.D./ 0.38 to 0.63 mm
- * Compliant with RoHS2/ REACH/ HF
- * Refer to "General Instruction and Notice when using Terminals and Connectors"
- * Contact CSG for details

Material: _____

Housing: PA66/UL94-V0;Color:White


Terminal: Phosphor/ Tin-plated

Note: 1. The above figure is the figure viewed from the connector mounting side.
2. Tolerances are non-cumulative: ± 0.08 mm for all centers.
3. The dimensions above should serve as a guideline. Contact CSG for details.


CSG

Tel: +86-769-85312070 85375507 E-mail: James@csg-china.com www.csg-china.com

A1202 DF57

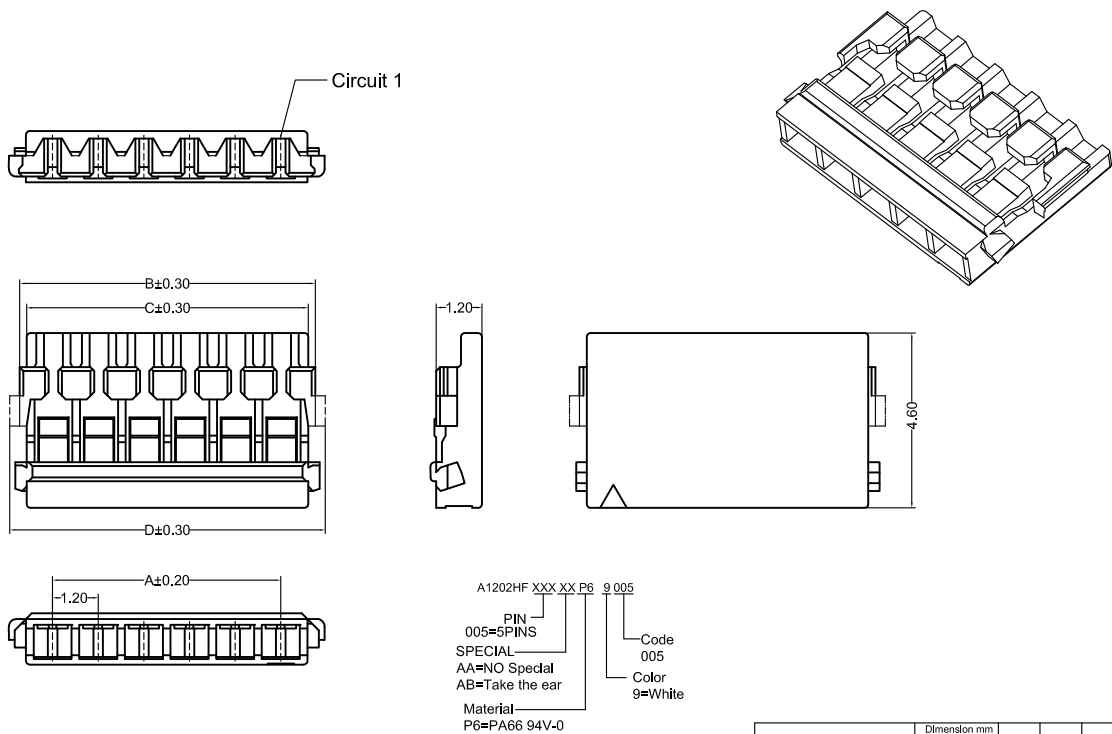

CSG PART NO.	Dimension mm				Q'ty/BAG
	A	B	C	D	
A1202HF002XXP69005	1.20	2.98	2.60	3.50	1000PCS
A1202HF003XXP69005	2.40	4.18	3.80	4.70	1000PCS
A1202HF004XXP69005	3.60	5.38	5.00	5.90	1000PCS
A1202HF005XXP69005	4.80	6.58	6.20	7.10	1000PCS
A1202HF006XXP69005	6.00	7.78	7.40	8.30	1000PCS

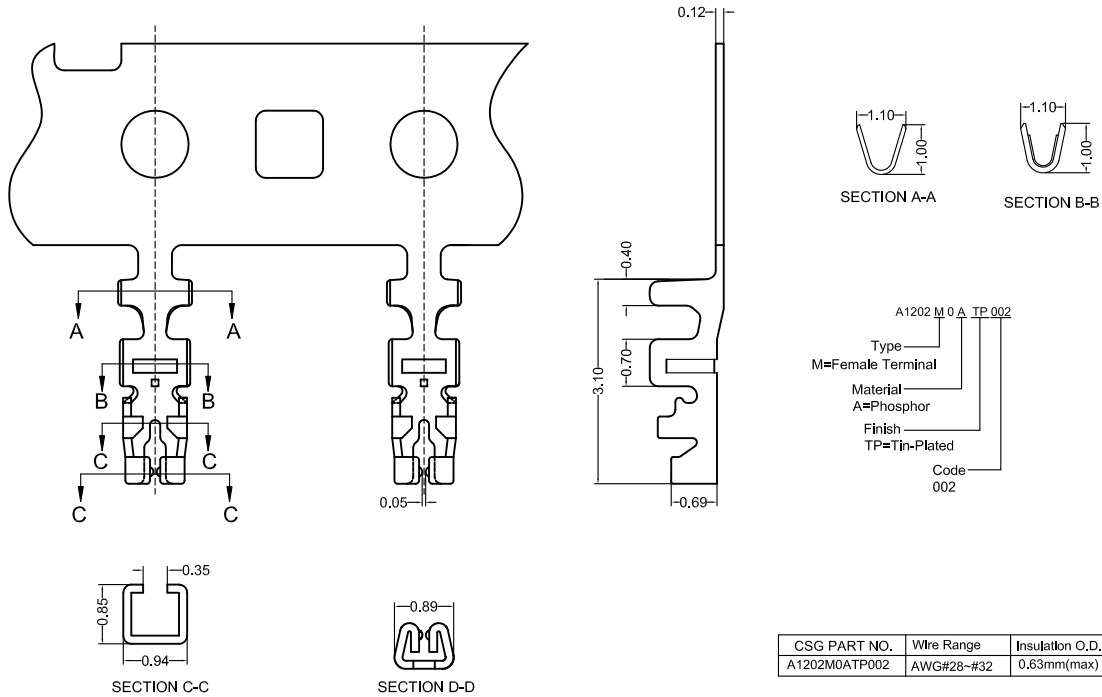

CSG PART NO.	Wire Range	Insulation O.D.	Q'ty/Reel
A1202M0ATP002	AWG#28~#32	0.63mm(max)	20000PCS

CSG